



FLS-10W

Parameter

- * Type: FLS-10W
- * Light source: LED
- * Power: 10W
- * Work voltage: AC(85V-265V)/(50-60HZ)
- * Power factor(PF): >0.9
- * Light efficiency: >60lm/w
- * Lumens: >600LM
- * No UV or IR light radiation
- * Fixture efficiency: >90%
- * View angle: 120°
- * Color instruction: >80
- * Color temperature(CCT): 2700-7000K
- * Life time: >50,000 hrs
- * IP grade: IP65
- * CE certification
- * Net weight: 0.7 kg
- * Dimension of the product: 125*96*87mm
- * Dimension of the external box: 31*55*20cm
- * Quantity (PCS): 20 pcs in a carton



FLS-10W





FLS-30W




FLS-50W

CE IP65

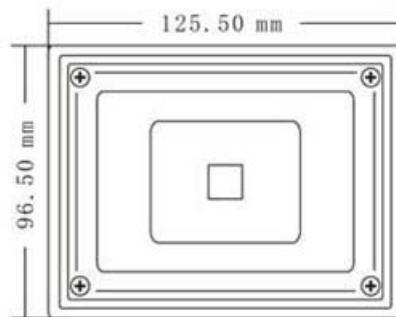

Photometric Results

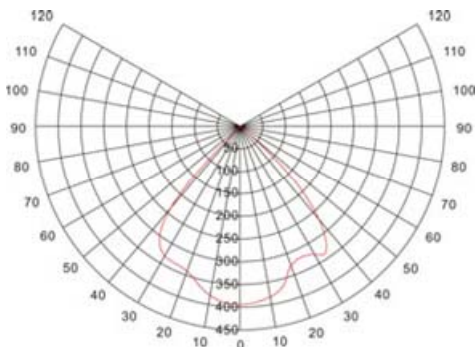

Illuminance Measurement





FLS-30W



FLS-10W



FLS-30W





FLS-50W


Parameter

- * Type: FLS-30W
- * Light source: LED
- * Power: 30W
- * Work voltage: AC(85V-265V)/(50-60HZ)
- * Power factor(PF): >0.9
- * Light efficiency: >60lm/w
- * Lumens: >1800LM
- * No UV or IR light radiation
- * Fixture efficiency: >90%
- * View angle: 140°
- * Color instruction: >80
- * Color temperature(CCT): 2700-7000K
- * Life time: >50,000 hrs
- * IP grade: IP65
- * CE certification
- * Net weight: 2.5 kg
- * Dimension of the product: 225*185*130mm
- * Dimension of the external box: 56.5*34.5*26cm
- * Quantity (PCS): 4 pcs in a carton


CE IP65



Photometric Results

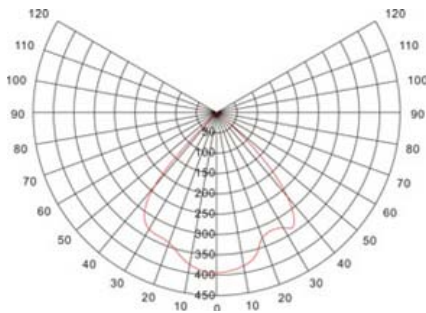

Illuminance Measurement

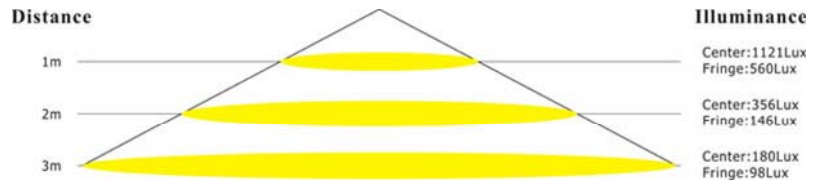

Parameter

- * Type: FLS-50W
- * Light source: LED
- * Power: 50W
- * Work voltage: AC(85V-265V)/(50-60HZ)
- * Power factor(PF): >0.9
- * Light efficiency: >60lm/w
- * Lumens: >3000LM
- * No UV or IR light radiation
- * Fixture efficiency: >90%
- * View angle: 140°
- * Color instruction: >80
- * Color temperature(CCT): 2700-7000K
- * Life time: >50,000 hrs
- * IP grade: IP65
- * CE certification
- * Net weight: 3.5 kg
- * Dimension of the product: 287*236*160mm
- * Dimension of the external box: 65.5*38*29cm
- * Quantity (PCS): 4 pcs in a carton



FLS-50W



FLS-10W





FLS-30W




FLS-50W


CE IP65



Photometric Results

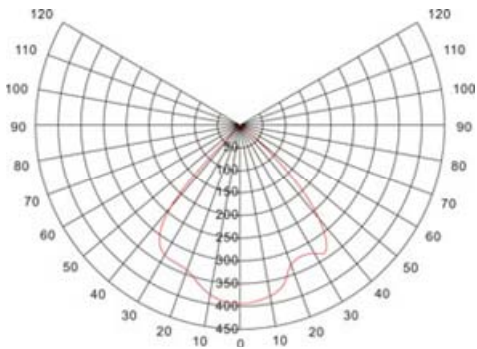

Illuminance Measurement

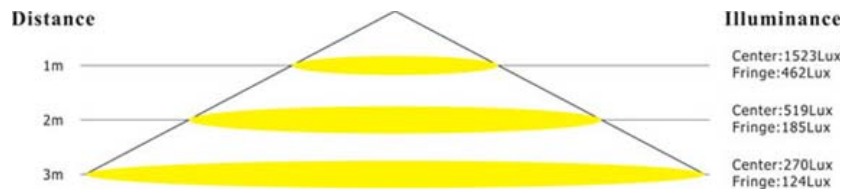

FlexSun, the Super LED floodlight



FlexSun, the innovative LED lamp from LeuchTek, for outdoor applications



- Copper-core to facilitate the heat conducting
- The FlexSun can be used as single unit (10W-30W) or combined as a large lamp e.g.300W, 600W
- IP65 protection
- All newest technologies in one lamp: single-chip power LED, copper heart conduction, lens
- Color optional: white/red/green/blue

